

# EINSTAR

3D Scanner

Go Ahead With Einstar





Shop Now Online:  
[www.einstar.com](http://www.einstar.com)



Our mission at SHINING 3D is to make 3D technology accessible to everybody. Einstar is our most affordable 3D scanner ever! You can digitize the world around you like never before!


Einstar can easily capture stable and clear details at a fast pace with high quality data outputs. Start 3D scanning at ease today with

**EINSTAR**




## Variety Applications

Support multiple data format outputs, compatible with 3D printers and 3D design softwares.



3D Printing



Designing



Digital Archiving



Education



Culture and Art




VR&AR



## High Quality Data

Collect high density point cloud data fast and easily with point distance up to 0.1mm.

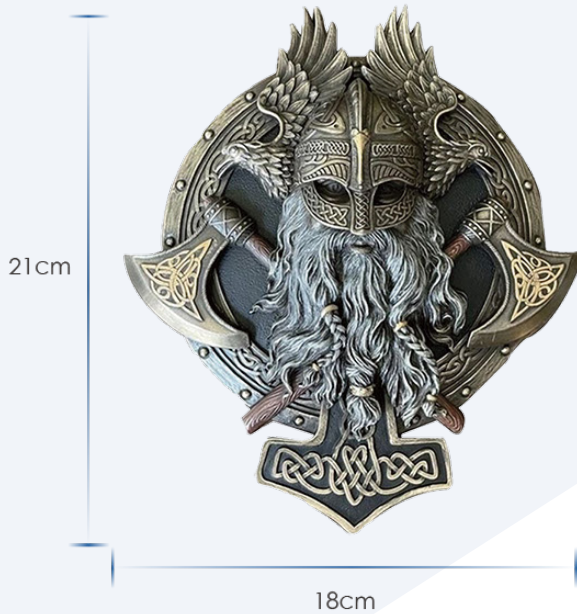



## High Color Fidelity

Benefit from built-in RGB color camera.  
3D data with authentic colors.



3D Data  
Scanned with Einstar



Physical Object



3D Data Scanned with Einstar



## Idea for Dark, Shiny Surfaces


Infrared VCSEL is ideal for scanning black and shiny reflective surfaces, ensuring reliable capture of challenging objects.





## User Friendly Software

- Data quality indicator optimizes the point cloud for complete data acquisition
- Multiple output formats (OBJ, STL, PLY, P3, 3MF) support different CAD design software and 3D printers
- New data rewind function avoids swipe all your data if any mistake or misalignment happens during scanning

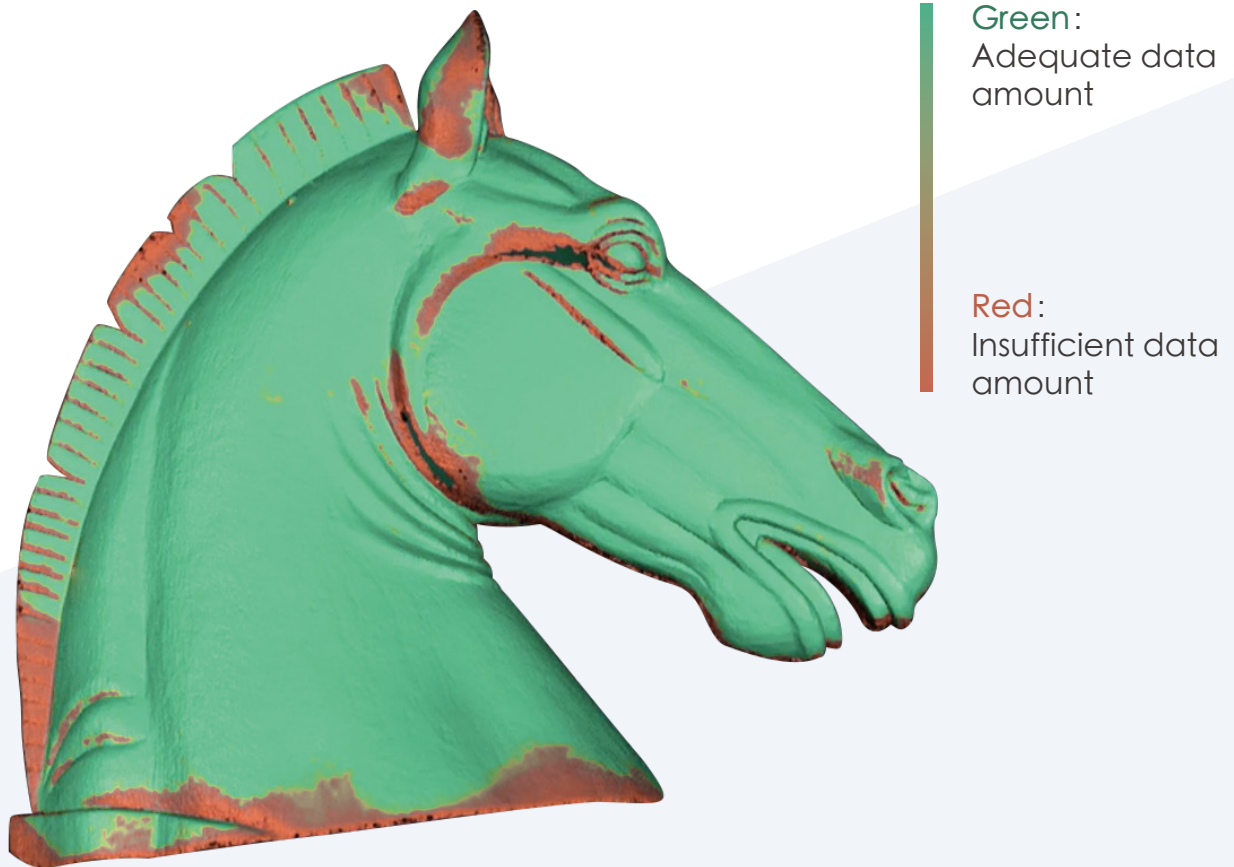




## Streamlined User Experience

Smooth and fast, scanning speed up to 14 FPS.

- Easy setup and operation
- Automatic alignment
- Intelligent algorithm
- Smart tracking performance

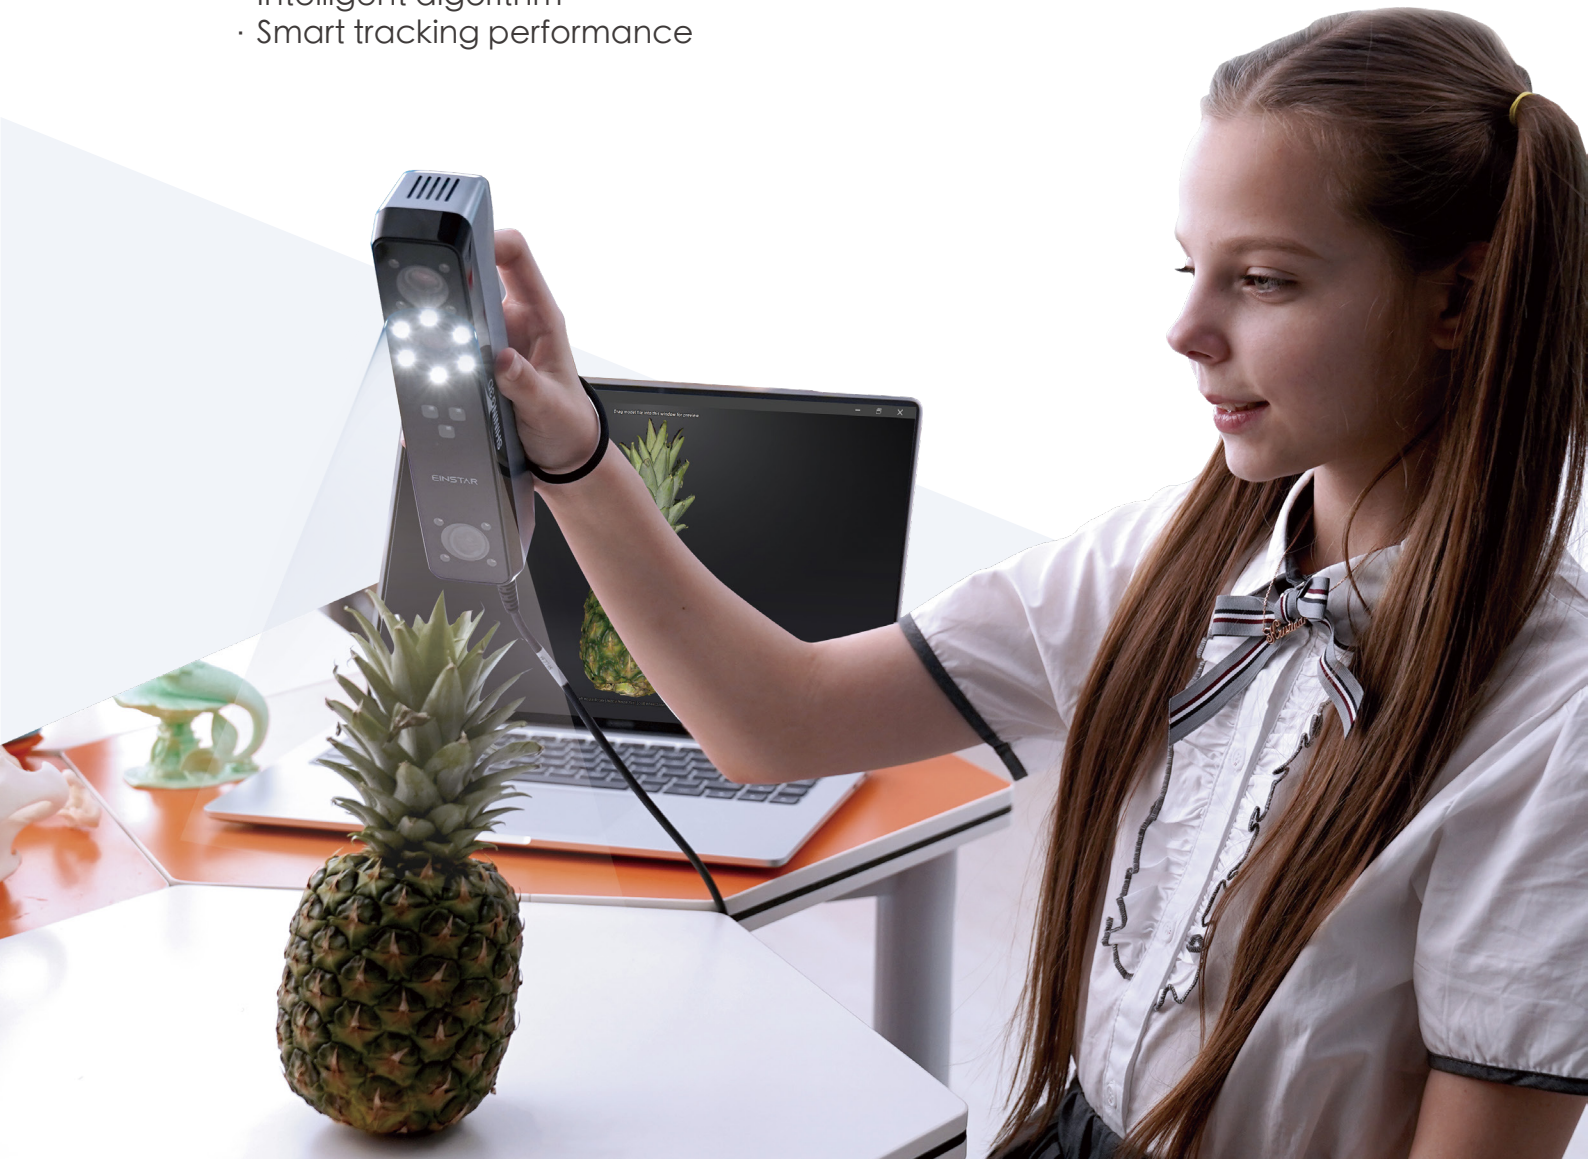



## Stable Outdoor Scanning

Equipped with 3 Infrared VCSEL Projectors, 2 Stereo Depth Cameras and 1 RGB Camera, Einstar can capture clear scan data and generate stable outputs outdoors.



Provide a flexible working distance for small and large objects.





# SHINING 3D Digital Cloud

One-click sharing 3D scanning data on SHINING 3D digital cloud platform.  
Display your great and creative minds.

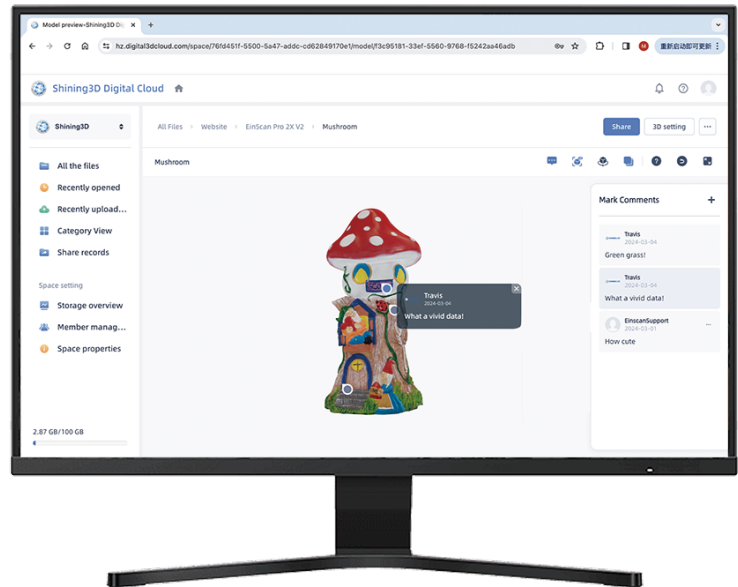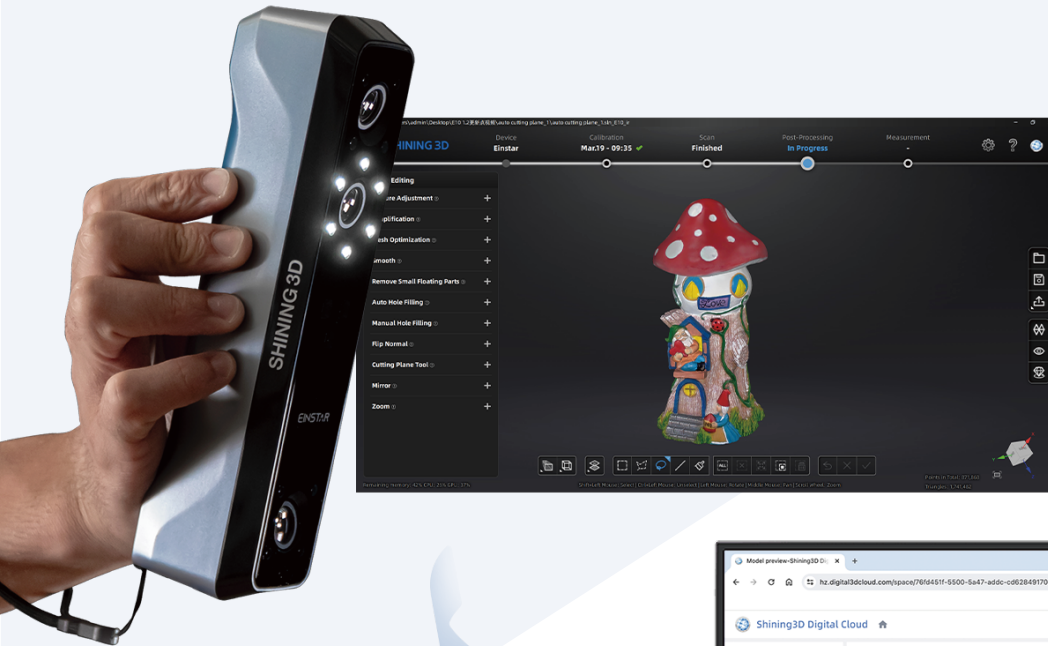



## Comfortable for Eyes, Easy to Scan Hair

- No projector light during scanning process.
- Comfortable and safe for eyes.
- Turning on "Hair Mode" to get sufficient hair data for human scan and improve the whole data completeness.



# TECHNICAL SPECIFICATIONS

## EINSTAR

|                              |                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Scan mode                    | Structured Light Scan                                                                                           |
| Point distance               | 0.1 ~ 3 mm                                                                                                      |
| Light source                 | Infrared VCSEL structured light                                                                                 |
| Optimal working distance     | 400 mm                                                                                                          |
| Depth of field               | 160 - 1400 mm                                                                                                   |
| Max. FOV                     | 434 x 379 mm (under optimal work distance)                                                                      |
| Scan speed                   | 980,000 points/s, up to 14 FPS                                                                                  |
| Align modes                  | Feature Alignment, Hybrid Alignment, Texture Alignment, Global Markers                                          |
| Safety                       | Eye-safe                                                                                                        |
| Texture scan                 | Yes                                                                                                             |
| Outdoor scanning             | Yes                                                                                                             |
| Interface                    | USB2.0 or above                                                                                                 |
| Output formats               | OBJ; STL; PLY; P3; 3MF                                                                                          |
| Scanner size                 | 220 x 46 x 55 mm                                                                                                |
| Carrying case size           | 245 x 245 x 90 mm                                                                                               |
| Scanner body weight          | 500g                                                                                                            |
| Operating temperature range  | 0 - 40°C                                                                                                        |
| Operating humidity range     | 10 - 90%                                                                                                        |
| Certifications               | CE, FCC, ROHS, WEEE, KC                                                                                         |
| Recommended configuration    | OS: Win10/11, 64 bit; Graphics card: NVIDIA GTX1060;<br>Video memory: ≥6GB; Processor: I7-11800H; Memory: ≥32GB |
| Basic computer configuration | OS: Win10, 64 bit; Graphics card: NVIDIA GTX1050;<br>Video memory: ≥4GB; Processor: I7-7700H; Memory: ≥16GB     |

\*Einstar infrared light source, certificated as Class 1 laser product, is safe under all conditions of normal use

\*Global Markers alignment is only available in Object Scan Mode

\*Einstar must require computer equipped with NVIDIA graphics card



@einstar3d

EINSTAR

[www.einstar.com](http://www.einstar.com)

[einstar\\_support@shining3d.com](mailto:einstar_support@shining3d.com)

Einstar-EN 20240904-V1.5